



29 Kg/24h



JD 35

JD 35  
230V/1N/50Hz  
Ice Cube




**CARATTERISTICHE**

- Produzione di singoli cubetti Gourmet pieni, puri e cristallini.
- Sistema di distribuzione ghiaccio con bottone a pressione: i cubetti cadono direttamente nel bicchiere del cliente senza manipolazioni.
- Finiture esterne in acciaio. • Controlli elettromeccanici semplici ed affidabili.
- Filtro condensatore accessibile frontalmente, facilmente rimovibile e lavabile.



**TIPO GHIACCIO / ICE TYPE**



PCS / CYCLE PZ/CICLO **24**

WEIGHT ICE PESO GHIACCIO **20 g**

PRODUZIONE GHIACCIO / ICE PRODUCTION **kg/24h lbs/24h**

Raffreddamento ad Aria Air Cooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	21	25	27	29
50°	46	55	60	64
21°	19	23	25	27
70°	42	51	55	60
32°	15	15	15	15
90°	33	33	33	33
38°	12	12	12	12
100°	26	26	26	26

**OPZIONALE**

- Voltaggi speciali su richiesta

**CAPACITÀ DEPOSITO / BIN CAPACITY**

**11,0 kg 550 pcs**

**DIMENSIONI / DIMENSIONS**

L x P x H (mm)



**380 x 515 x 1696**



**470 x 660 x 1710**

**VOLTAGE**



**230V/50/1**

**GAS**



**R134a  
GWP=2141**

**FEATURES**

- Produces individual Gourmet crystal clear supercubes.
- Push-button dispensing system: cubes drop directly into the consumer's glass, with no manipulation.
- Resistant stainless steel exterior. • Simple and reliable electromechanic controls.
- Front access condenser air filter, removable and washable. • Water system protected by patented anti-scale system.

**OPTIONAL**

- Special voltages, on request

**DATI TECNICI - SPECIFICATIONS**



cond

comp. W

ABS. W

Fuse

Kwh/100Kg

l / h

kg

kg

JD35 A	220-240/50/1		790	400	10	46.6	2.7	51	60
JD35 W	220-240/50/1		1200	420	10	46.6	125	51	60



Raffreddamento ad Acqua WaterCooled Unit

Temp. Aria Air Temp.	Temp. Acqua / Water Temp.			
	32°	21°	15°	10°
°C	32°	21°	15°	10°
°F	90°	70°	60°	50°
10°	24	27	29	30
50°	53	60	64	66
21°	22	25	26	28
70°	49	55	57	62
32°	20	21	22	22
90°	44	46	49	49
38°	19	20	20	21
100°	42	44	44	46


Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811 email: info@jolyce.it www.jolyce.it



## DIMENSIONI - DIMENSIONS

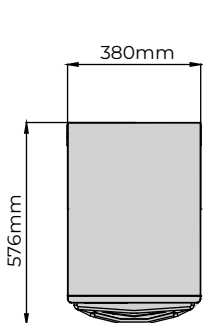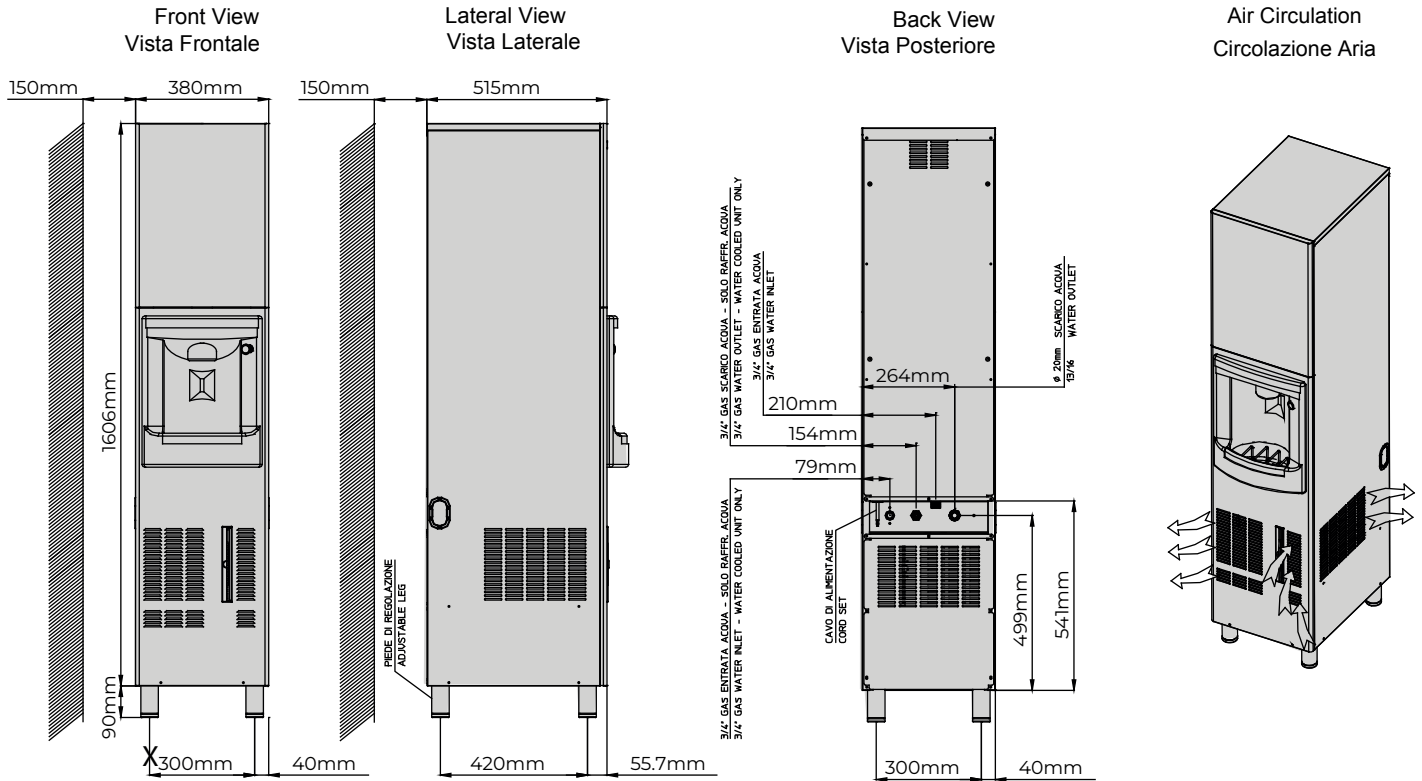

Top View  
Vista Superiore

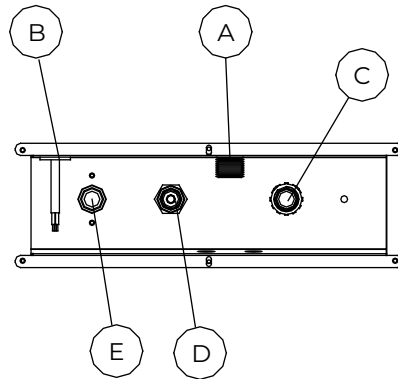

- A** Water inlet connection water condensation  
Entrata acqua condensatore ad acqua -  
3/4"gas OPTIONAL
- B** Electrical cable supply /Ingresso alimentazione  
elettrica
- C** Water outlet connection / Attacco scarico acqua Ø  
20 mm
- D** Water outlet connection water condensation / Uscita  
acqua condensatore ad acqua - 3/4" gas
- E** Water inlet connection / Attacco entrata acqua - 3/4" gas

### Condizioni operative - Operating requirements

	Min.	Max
Temp. Ambiente / Air Temperature	10°C	35°C
Temp. Acqua / Water Temperature	5°C	30°C
Press. Acqua / Water Pressure	1 bar (14psi)	5 bar (70psi)
Conducibilità acqua / Water conductivity	30 µS	500 µS
Alimentazione / Electrical supply	-10%	+10%