JD200.10

JD200.10 ALLGAS
220-240/50/1
Nugget Ice Makers

190 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:
JD200.10 - JD120.10

FEATURES

- Steel shell
- Air and water condensation
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Ice humidity regulation
- Ice Deposit Adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Programmable ice production
- Removable and washable air filter
- Side suction and upper air exhaust

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

10,5 kg

DIMENSIONS

	L x P x H (mm)
	467 x 600 x 1000
	545 x 640 x 1135

VOLTAGE

220-240/50/1
220-240/60/1

GAS

R290
GWP 3

ICE TYPE

		WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
	Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	190 419	178 392	175 386	162 357
21° 70°	171 377	163 359	157 346	144 317
32° 90°	152 335	146 322	140 309	126 278
38° 100°	144 317	139 306	132 291	120 264

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JD200.10	AG	220-240/50/1N		878	800	10	10.7	5.8	88	96
JD200.10	AG	220-240V/1N/60Hz		2175	830	10	10	7.6	88	96

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu


JD200.10

190 kg/ 24h

Nugget Ice Makers / Nugget Ice Makers:
JD200.10 - JD120.10

JD200.10 ALLGAS
220-240/50/1
Nugget Ice Makers

DIMENSIONS

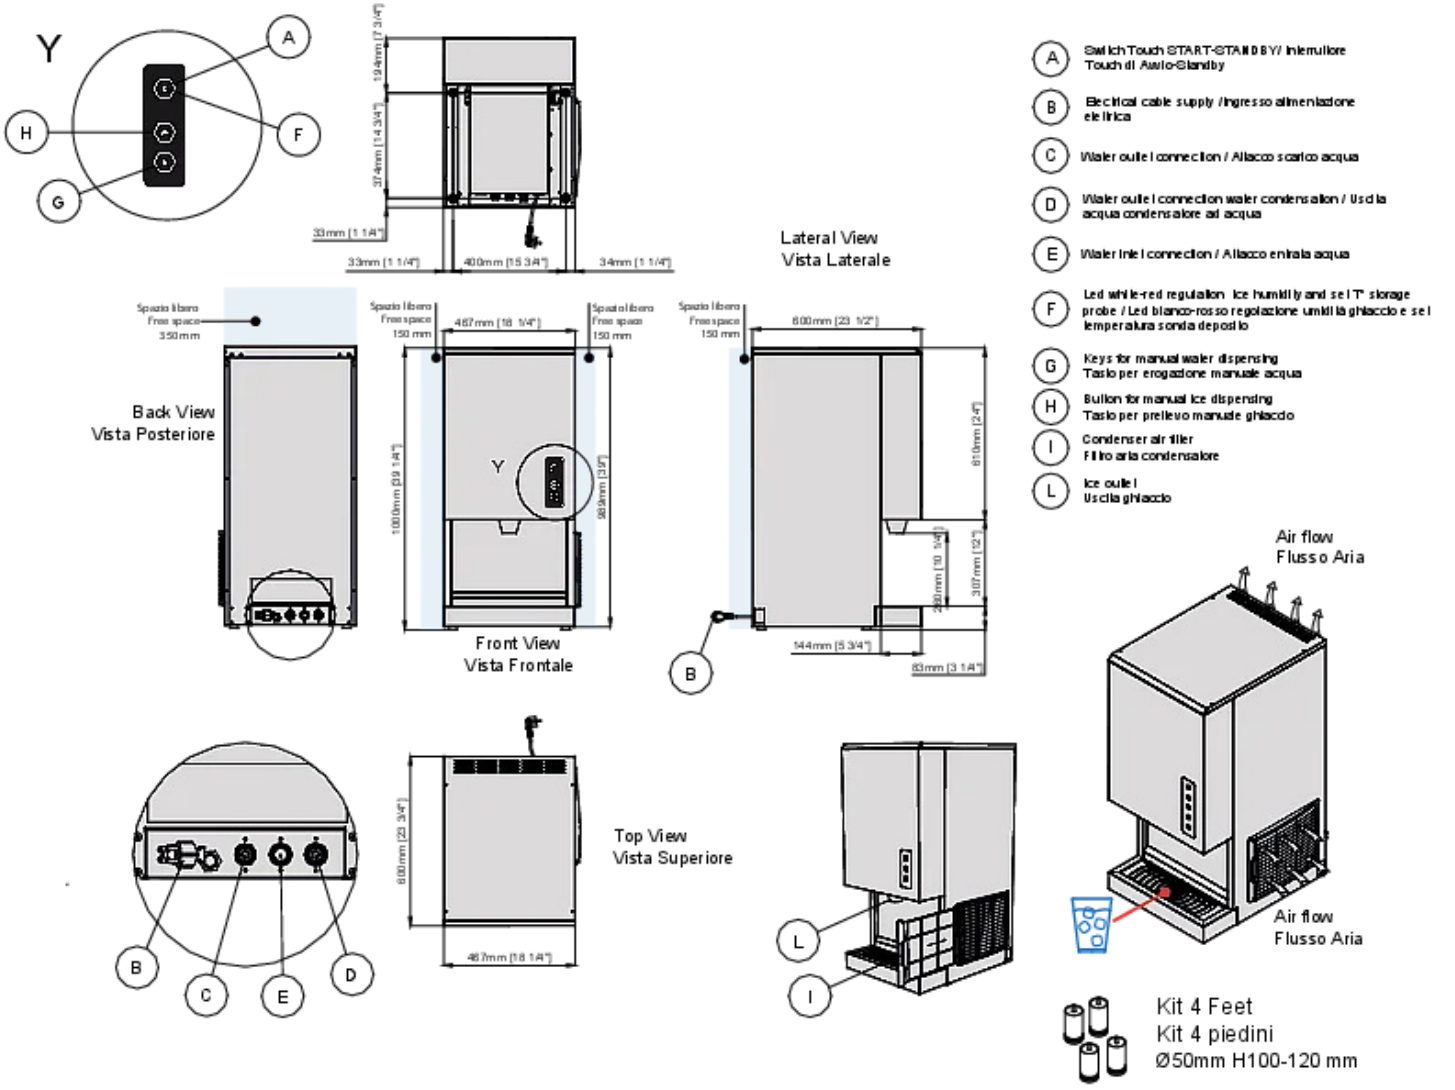

A Switch Touch START-STAND BY/ Interruttore Touch di Avvio-Standby

B Electrical cable supply /Ingresso alimentazione elettrica

C Water outlet connection / Attacco scarico acqua

D Water outlet connection water condensation / Uscita acqua condensatore ad acqua

E Water inlet connection / Attacco entrata acqua

F Led white-red regulation ice humidity and set T° storage probe / Led bianco-rosso regolazione umidità ghiaccio e set temperatura sonda deposito

G Keys for manual water dispensing
Tasto per erogazione manuale acqua

H Button for manual ice dispensing
Tasto per prelievo manuale ghiaccio

I Condenser air filter
Filtro aria condensatore

L Ice outlet
Uscita ghiaccio

Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL



Heat expelled	2905 W
Air Volume	300 m³/h

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu