JF125

130 kg/ 24h

JF125 ALLGAS
220-240/50/1
Granular ice makers

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

USB | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

MG105-MG155 (KBD105-155)
MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

	L x P x H (mm)
	570 x 545 x 535
	650 x 600 x 690

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

		RESIDUAL WATER CONTENUTO ACQUA
	Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	130 287	125 276	121 267	112 247
21° 70°	120 264	118 260	114 251	105 231
32° 90°	98 216	95 209	91 201	85 187
38° 100°	88 194	86 190	82 181	76 168

Water cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	118 260	115 253	106 234	95 209
21° 70°	112 247	110 242	100 220	90 198
32° 90°	106 234	104 229	94 207	84 185
38° 100°	97 214	96 212	86 190	79 174

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JF125	AG	220-240/50/1N		634	610	10	12.4	3.8	53	60
JF125	AG	220-240/50/1N		634	500	10	12.2	40	53	60

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu

JF125

130 kg/ 24h

JF125 ALLGAS


220-240/50/1

Granular ice makers

Granular ice makers / Granular ice makers:

JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

DIMENSIONS

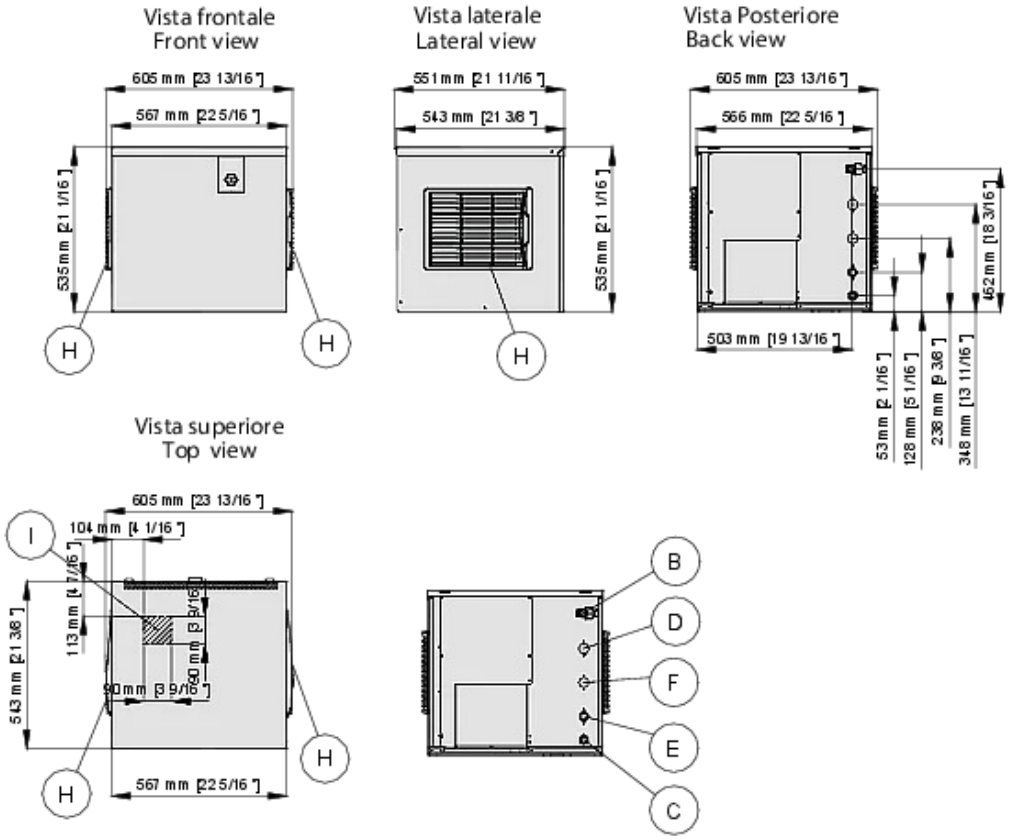

B Ingresso alimentazione elettrica
Electrical cable supply

C Attacco scarico acqua
Water outlet connection
ø 20 mm

D Uscita acqua condensatore ad acqua/Water outlet connection water condensation 3/4"G

E Attacco entrata acqua
Water inlet connection
3/4"G

F Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G

H Filtro aria
Air filter


I Foro caduta ghiaccio
Ice drop area

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL

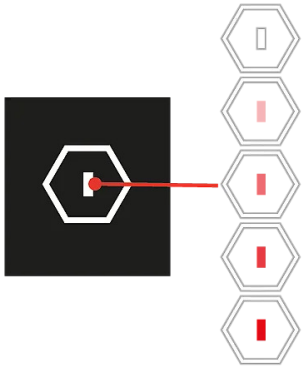

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	1707 W
Air Volume	300 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu