JF165

JF165 ALLGAS
220-240/50/1
Granular ice makers

165 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

USB | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

MG105-MG155 (KBD105-155)
MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

	L x P x H (mm)
	570 x 545 x 535
	650 x 600 x 690

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

		RESIDUAL WATER CONTENUTO ACQUA
	Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	165 364	158 348	150 331	139 306
21° 70°	156 344	150 331	144 317	134 295
32° 90°	143 315	136 300	130 287	120 264
38° 100°	132 291	126 278	120 264	110 242

Water cooling

Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	177 390	173 381	167 368	160 353
21° 70°	171 377	169 372	164 361	156 344
32° 90°	164 361	162 357	157 346	147 324
38° 100°	159 350	157 346	153 337	141 311

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JF165	AG	220-240/50/1N		665	660	10	11.3	5.4	55	62
JF165	AG	220-240/50/1N		665	580	10	7.5	55.8	55	62

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu


JF165

JF165 ALLGAS
220-240/50/1
Granular ice makers

165 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

DIMENSIONS

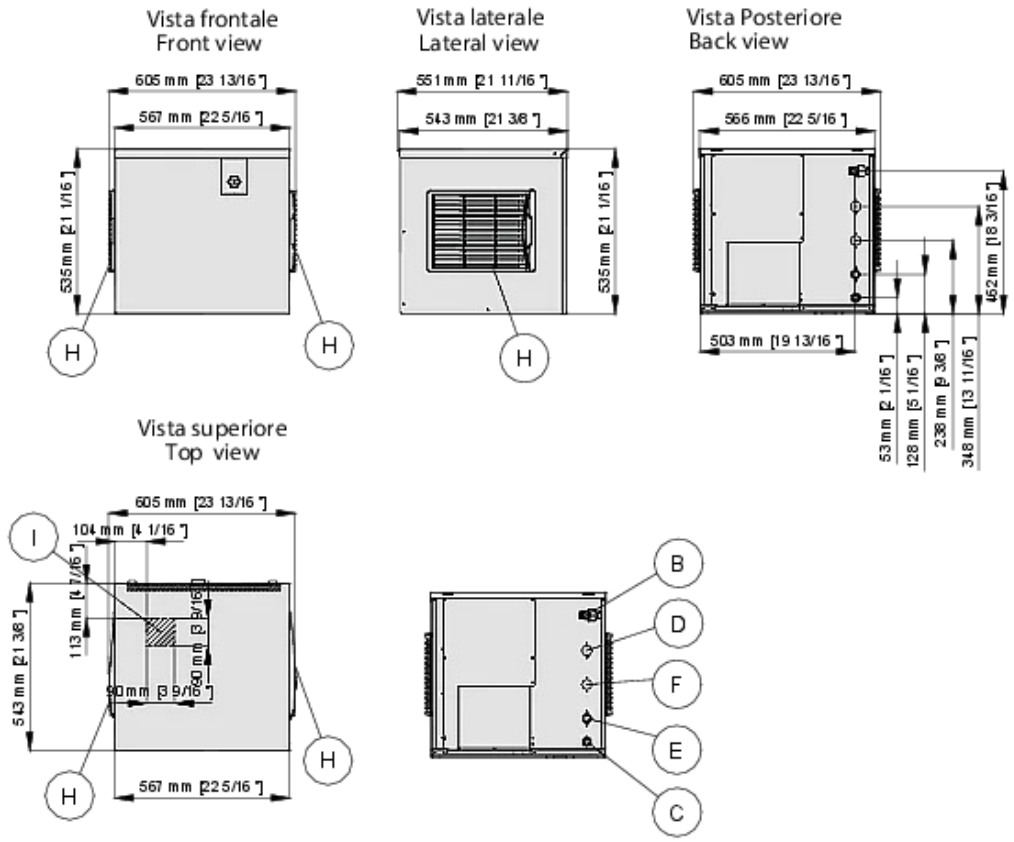

B Ingresso alimentazione elettrica
Electrical cable supply

C Attacco scarico acqua
Water outlet connection
ø 20 mm

D Uscita acqua condensatore ad acqua/Water outlet connection water condensation 3/4"G

E Attacco entrata acqua
Water inlet connection
3/4"G

F Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G

H Filtro aria
Air filter


I Foro caduta ghiaccio
Ice drop area

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL

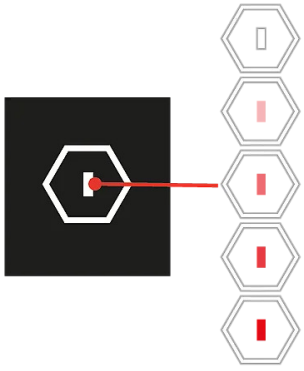

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	2218 W
Air Volume	300 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu