JF305S

272 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

JF305S ALLGAS
220-240/50/1
Granular ice makers

USB | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

MG205-MG255(KB205-255)
MG305(KB305)
MG405(KBM405)
MG505(KBM505)

DIMENSIONS

	L x P x H (mm)
	570 x 545 x 535
	650 x 600 x 690

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

	RESIDUAL WATER CONTENUTO ACQUA
Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	272 599	259 571	247 544	221 487
21° 70°	268 591	255 562	242 533	217 478
32° 90°	224 494	212 467	199 439	174 383
38° 100°	213 469	200 441	187 412	162 357

Water cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	240 529	228 503	221 487	200 441
21° 70°	235 518	224 494	216 476	197 434
32° 90°	232 511	218 480	207 456	190 419
38° 100°	220 485	208 458	199 439	182 401

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JF305S	AG	220-240/50/1N		1388	950	10	10.9	8.4	57	64
JF305S	AG	220-240/50/1N		1388	880	10	10.1	63.7	57	64

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu


JF305S

272 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

JF305S ALLGAS
220-240/50/1
Granular ice makers

DIMENSIONS

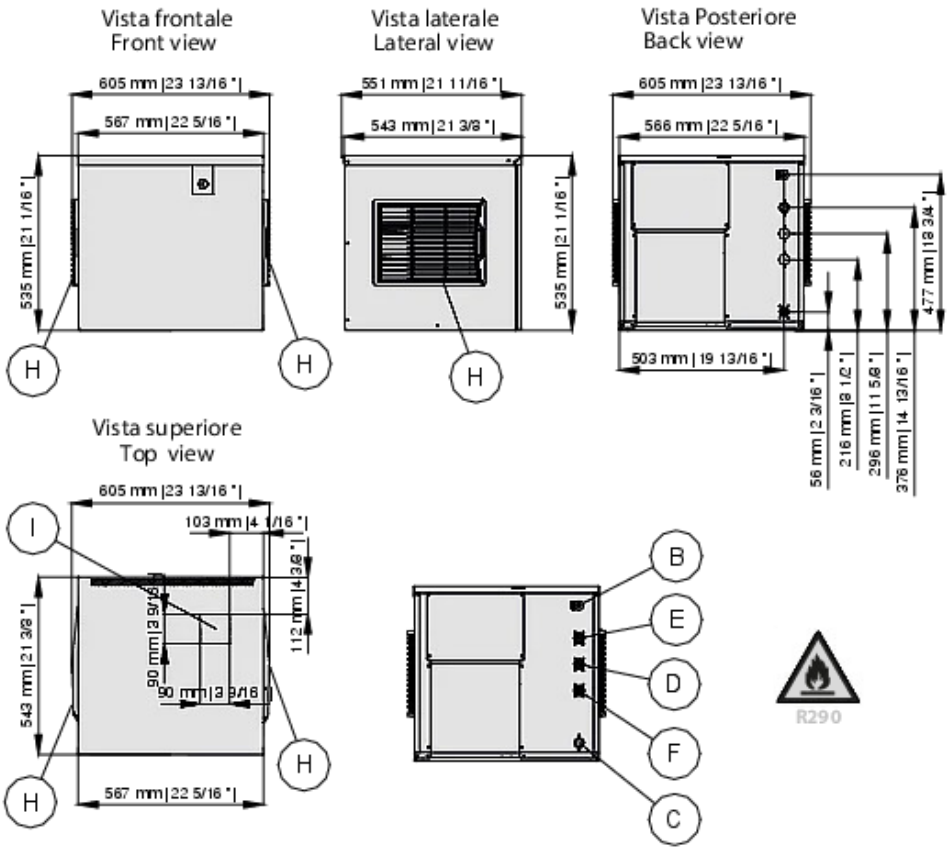


- B — Ingresso alimentazione elettrica / Electrical cable supply
- C — Attacco scarico acqua / Water outlet connection ø 20 mm
- D — Uscita acqua condensatore ad acqua/Water outlet connection water condensation 3/4"G
- E — Attacco entrata acqua / Water inlet connection 3/4"G
- F — Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G
- H — Filtro aria / Air filter
- I — Foro caduta ghiaccio / Ice drop area

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL

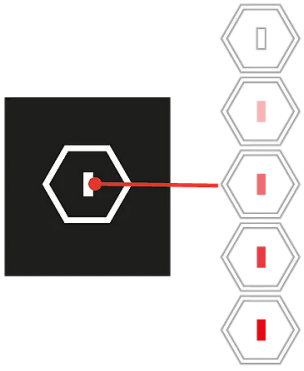

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2594 W
Air Volume	300 m³/h

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel. +39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu