JF405

400 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

JF405 ALLGAS
220-240/50/1
Granular ice makers

USB | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

MG405(KBM405)
MG505(KBM505)
MB500-700-1000
MC140-320-620

DIMENSIONS

	L x P x H (mm)
	668 x 668 x 709
	750 x 727 x 855

VOLTAGE

220-240/50/1

GAS

R290
GWP 3

ICE TYPE

		RESIDUAL WATER CONTENUTO ACQUA
	Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	400 881	395 870	386 850	349 769
21° 70°	385 848	367 808	352 775	323 711
32° 90°	338 744	324 714	310 683	279 614
38° 100°	249 548	240 528	229 504	207 456

Water cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	410 903	401 883	387 852	349 769
21° 70°	412 908	391 861	378 833	341 751
32° 90°	391 861	377 830	356 784	328 722
38° 100°	359 791	346 762	326 718	297 654

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JF405	A AG	220-240V/50/1		2446	1400	16	10.7	13.1	103	112
JF405	W AG	220-240V/50/1		2446	1300	16	8.3	65.6	103	112

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu


JF405

400 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

JF405 ALLGAS
220-240/50/1
Granular ice makers

DIMENSIONS

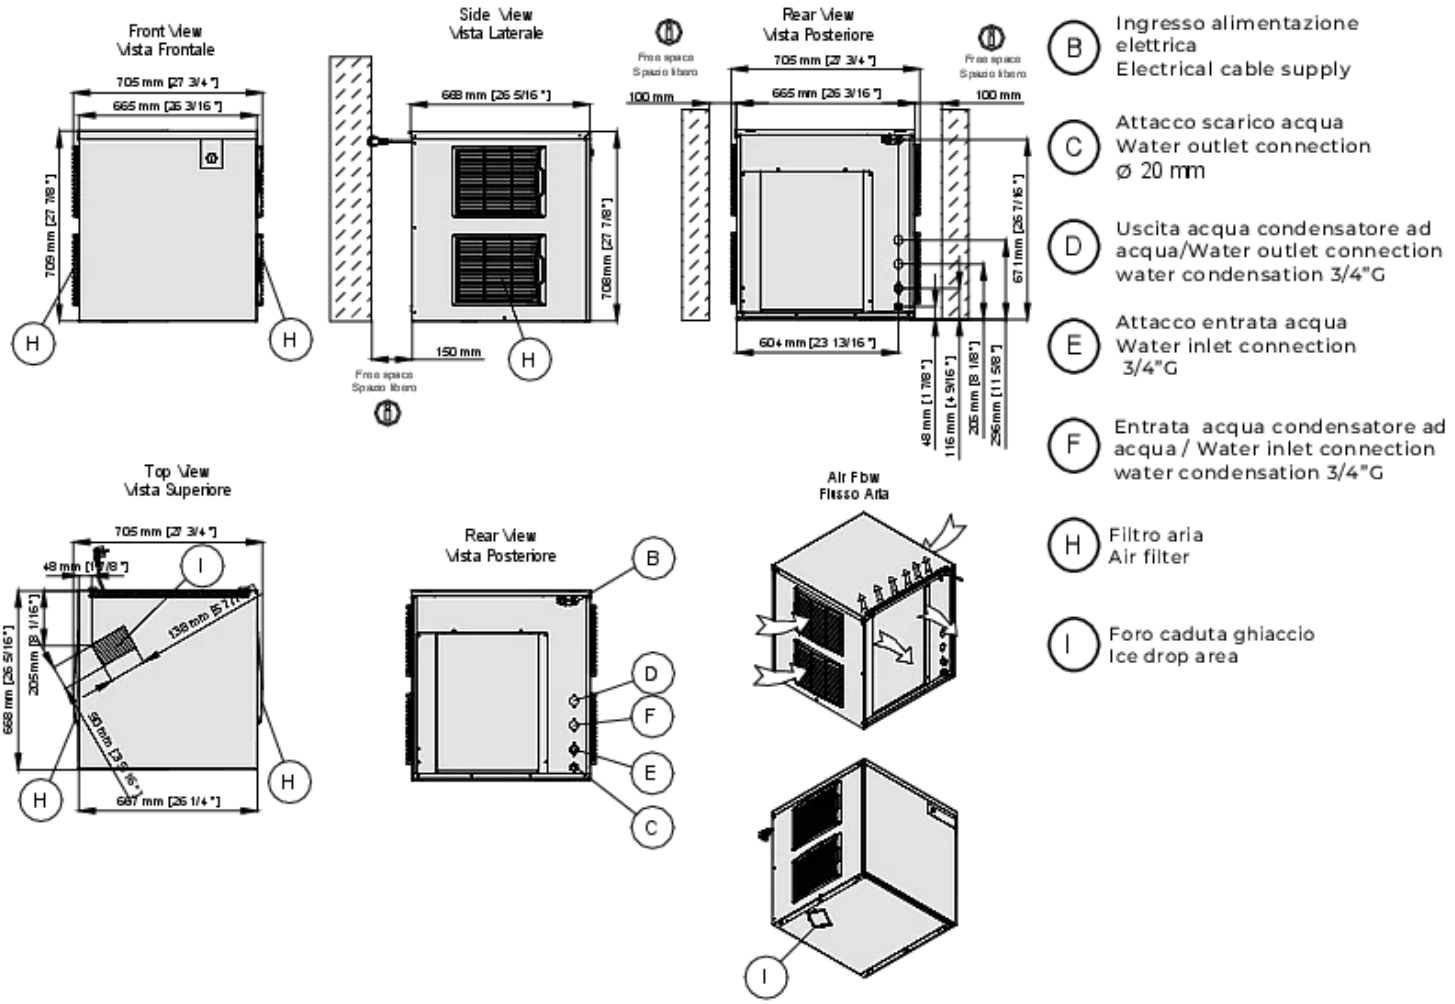

B Ingresso alimentazione elettrica
Electrical cable supply

C Attacco scarico acqua
Water outlet connection
ø 20 mm

D Uscita acqua condensatore ad acqua/Water outlet connection water condensation 3/4"G

E Attacco entrata acqua
Water inlet connection
3/4"G

F Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G

H Filtro aria
Air filter


I Foro caduta ghiaccio
Ice drop area

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



TOUCH CONTROL

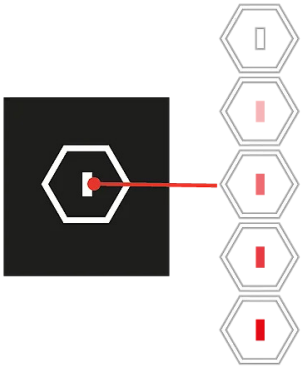

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	3679 W
Air Volume	1000 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu