JF95C

90 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

JF95C ALLGAS
220-240/50/1
Granular ice makers

USB | PROGRAMMED OZONE CYCLE | SCHEDULED PRODUCTION | TOUCH CONTROL | BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm
- Removable and washable air filter
- Frontal air intake and exhaust

OPTIONAL

- Programmable sanitizing cycle with ozone



RECOMMENDED DEPOSITS

18 kg

DIMENSIONS

	L x P x H (mm)
	500 x 597 x 694
	560 x 650 x 970

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

ICE TYPE

		RESIDUAL WATER CONTENUTO ACQUA
	Flake Ice	25%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	90 198	88 194	84 185	76 168
21° 70°	77 170	75 165	71 156	64 141
32° 90°	64 141	62 137	58 128	50 110
38° 100°	58 128	56 123	54 119	48 106

Water cooling

Temp. Aria Air Temp. °C / °F	Temp. Acqua /Water Temp. 10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	84 185	82 181	78 172	70 154
21° 70°	80 176	78 172	73 161	66 145
32° 90°	76 168	74 163	70 154	62 137
38° 100°	70 154	68 150	65 143	58 128

TECHNICAL DATA

			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JF95C	AG	220-240/50/1N		346	410	10	16	2.5	48	55
JF95C	AG	220-240/50/1N		346	360	10	11	36	48	55

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu


JF95C

JF95C ALLGAS
220-240/50/1
Granular ice makers

90 kg/ 24h

Granular ice makers / Granular ice makers:
JF95C - JF130C - JF160C - JF200C - JF125 - JF165 - JF205 - JF305S - JF405 - JF505

DIMENSIONS

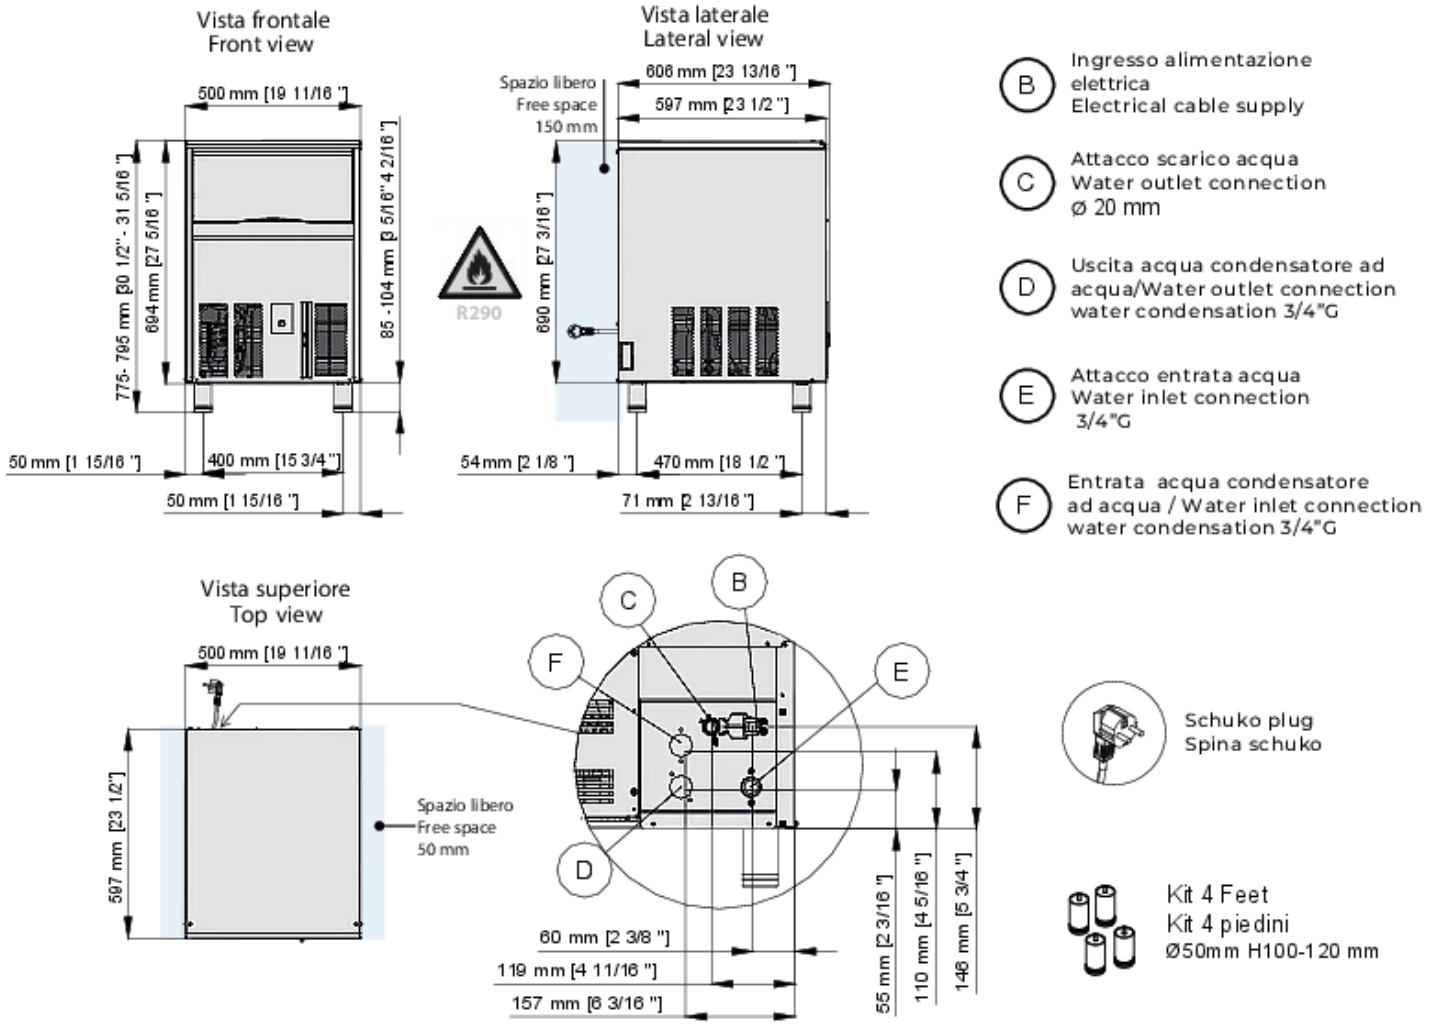

- (B) Ingresso alimentazione elettrica / Electrical cable supply
- (C) Attacco scarico acqua / Water outlet connection ø 20 mm
- (D) Uscita acqua condensatore ad acqua/Water outlet connection water condensation 3/4"G
- (E) Attacco entrata acqua / Water inlet connection 3/4"G
- (F) Entrata acqua condensatore ad acqua / Water inlet connection water condensation 3/4"G

Schuko plug
Spina schuko

Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm

ICEWORLD


Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones

Available on the Google Play



Download on the App Store

TOUCH CONTROL

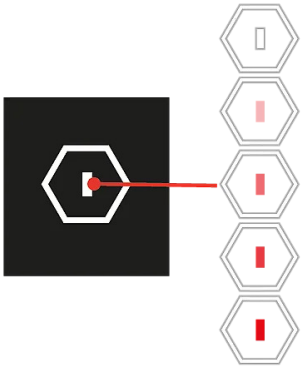

Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

Heat expelled	985 W
Air Volume	300 m³/h

Via del Lavoro, 9 31033 Castelfranco Veneto (TV) Tel.
+39 0423.738452 Fax +39 0423.722811
email: info@castelmac.it
www.castelmac.eu - www.icematic.eu