



23 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

JP 23 - JP23n - JP25 - JP30 - JP36 - JP45 - JP50 - JP62 - JP80 - JP95 - JP150

JP 23

JP23 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology
- Feet kit 100mm

RECOMMENDED DEPOSITS

7 kg
333 pcs

DIMENSIONS

	L x P x H (mm)
	340 x 545 x 690
	460 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

TECHNICAL DATA

											
			cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg	
JP 23	A AG	220-240V/1N/50Hz		354	200	10	26.1	2.37	30	37	
JP 23	W AG	220-240V/1N/50Hz		354	200	10	14.4	29.6	30	37	

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
 Hollow Cube 23n-23-25 29 x 32.5 x 41 mm	15	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	23 51	22 48	21 46	18 40
21° 70°	22 48	21 46	20 44	16 35
32° 90°	17 37	16 35	15 33	12 26
38° 100°	14 31	13 29	12 26	11 24

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	23 51	22 48	21 46	18 40
21° 70°	22 48	21 46	20 44	17 37
32° 90°	21 46	20 44	19 42	16 35
38° 100°	20 44	19 42	18 40	15 33

DIMENSIONS

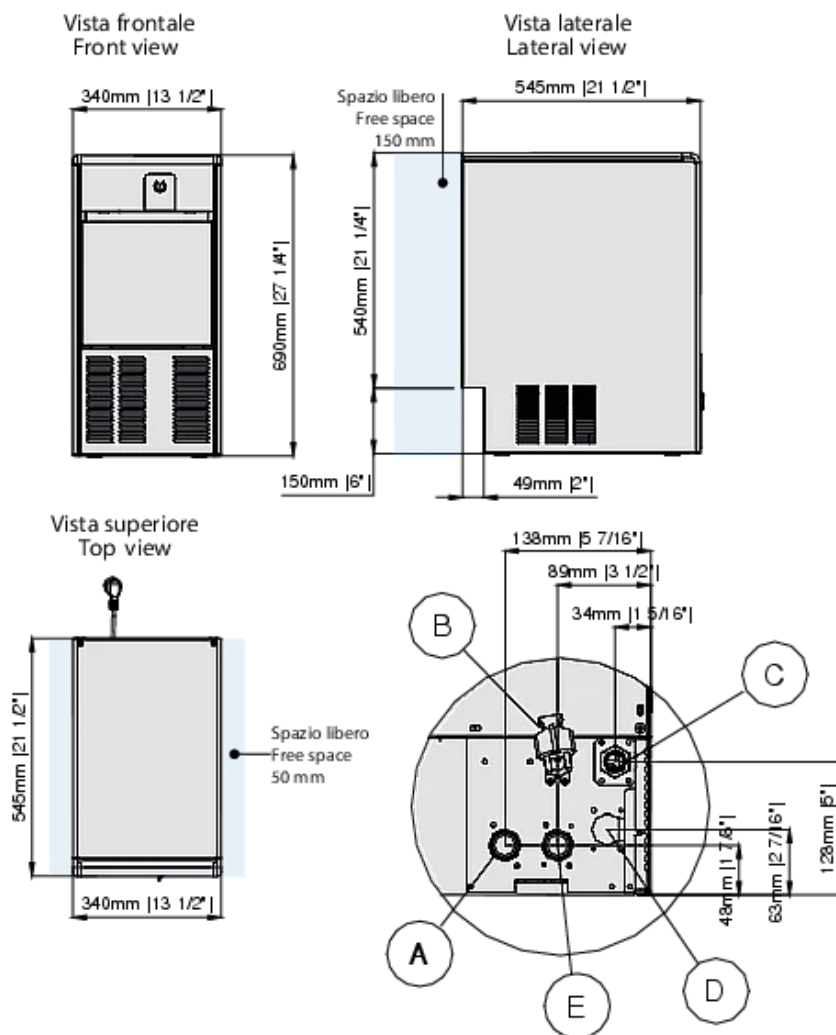

A Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G

B Ingresso alimentazione elettrica / Electrical cable supply

C Attacco scarico acqua / Water outlet connection Ø 20 mm

D Uscita acqua condensatore ad acqua / Water outlet connection water condensation - 3/4"G

E Attacco entrata acqua / Water inlet connection 3/4"G




Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(optional)

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Available on the
Google Play



Download on the
App Store

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	514 W
Air Volume	300 m³/h