



150 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

JP 23 - JP23n - JP25 - JP30 - JP36 - JP45 - JP50 - JP62 - JP80 - JP95 - JP150

JP150

JP150 ALLGAS

220-240/50/1

Palette Ice Makers



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report
- Feet kit 100mm

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology



RECOMMENDED DEPOSITS

67 kg
3190 pcs

DIMENSIONS

	L x P x H (mm)
	920 x 650 x 1280
	970 x 700 x 1370

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JP150 A AG 220-240V/1N/50Hz			1536	850	10	17.4	15.5	105	116
JP150 W AG 220-240V/1N/50Hz			1536	810	10	11	122	105	116
JP150 A AG 220-240V/1N/60Hz			1651	1100	10	20.1	17.8	105	116

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Hollow Cube 150 29 x 32.5 x 41 mm	90	21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	150 331	146 322	138 304	124 273
21° 70°	142 313	137 302	130 287	118 260
32° 90°	123 271	120 264	115 253	105 231
38° 100°	111 245	107 236	102 225	94 207

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	151 333	147 324	144 317	123 271
21° 70°	149 328	146 322	143 315	125 276
32° 90°	145 320	143 315	140 309	123 271
38° 100°	140 309	139 306	138 304	118 260

DIMENSIONS

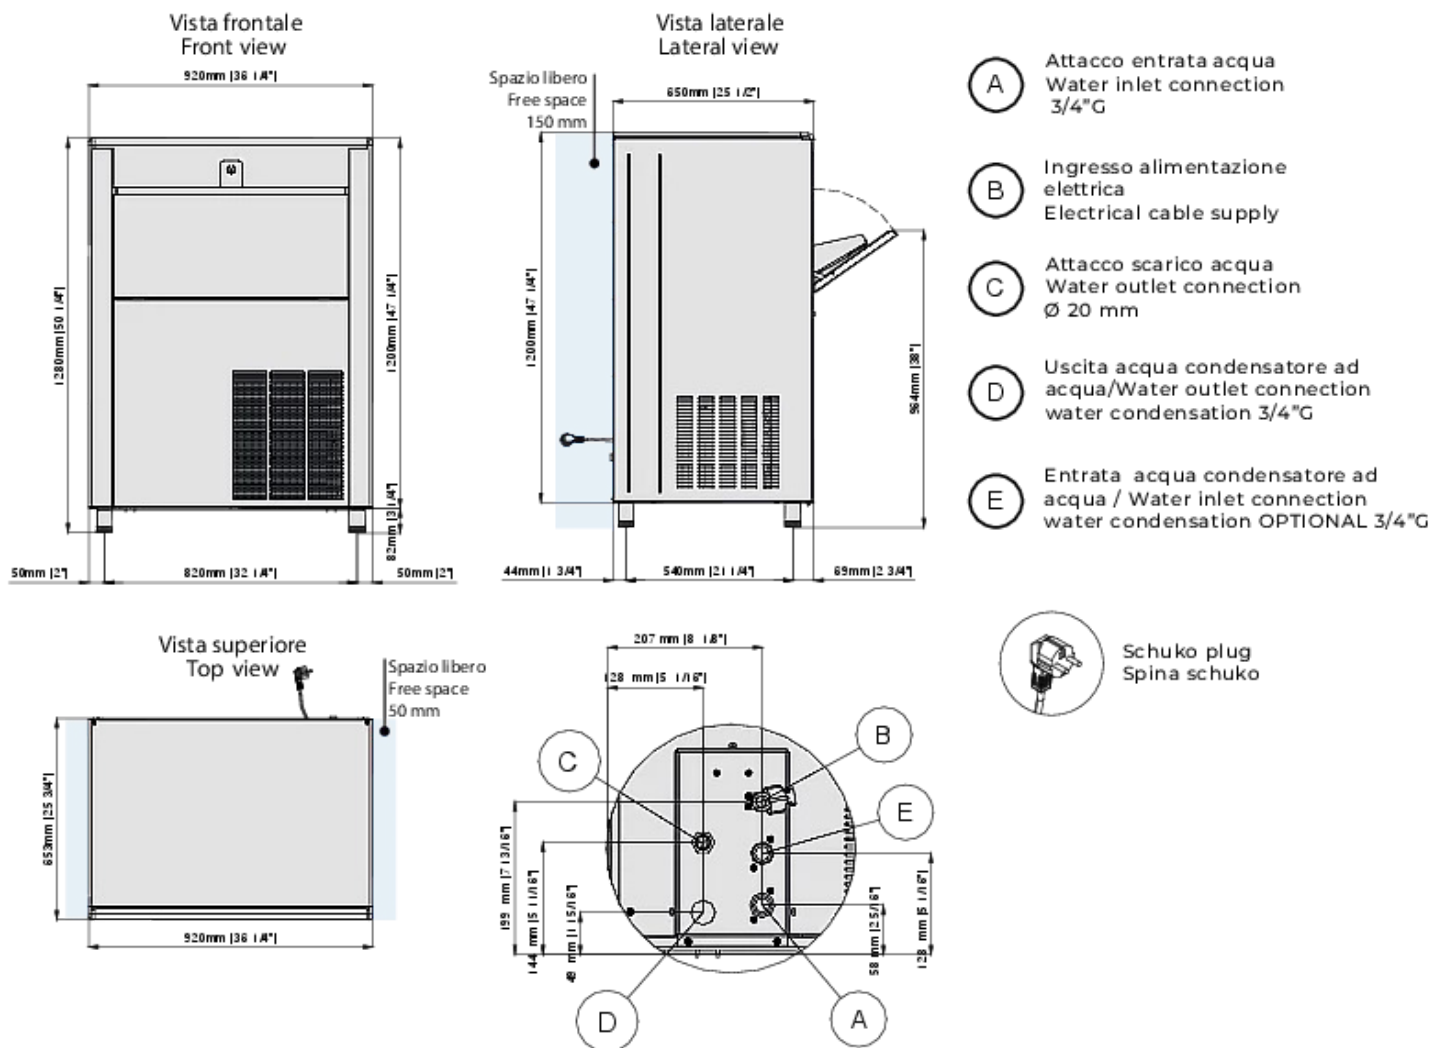

ICEWORLD

TOUCH CONTROL



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	4009 W
Air Volume	1100 m³/h