



38 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

JS28 - JS28 + - JS38 - JS38L - JS46 - JS46L - JS54 - JS70 - JS70L - JS90 - JS90L



FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm

RECOMMENDED DEPOSITS

11,5 kg
287 pcs

DIMENSIONS

L x P x H (mm)	
	400 x 540 x 704
	460 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JS38L A AG 220-240/50/1N			670	370	10	29	3.2	40	34
JS38L W AG 220-240/50/1N			670	290	10	20.3	43.2	40	34

JS38L

JS38L ALL GAS

220-240/50/1

Spray Ice Makers

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO	
Full Ice Cube			
40 g -38/46	20	40 g	
45 x 39 x 46			
mm			

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling







Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	38 84	36 79	34 75	30 66
21° 70°	34 75	32 71	30 66	27 60
32° 90°	30 66	28 62	26 57	23 51
38° 100°	23 51	22 48	21 46	19 42

Water cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	36 79	34 75	32 71	28 62
21° 70°	34 75	32 71	30 66	26 57
32° 90°	33 73	31 68	29 64	25 55
38° 100°	29 64	28 62	26 57	21 46

DIMENSIONS

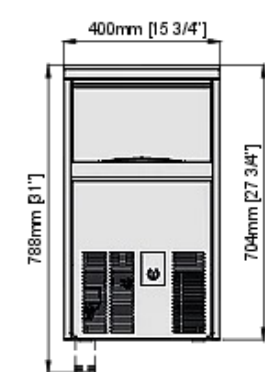

- (B)** Electrical cable supply
Ingresso alimentazione elettrica
- (C)** Water outlet connection
Attacco scarico acqua Ø 20 mm
- (D)** Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm- 3/4" G
- (E)** Water inlet connection / Attacco
entrata acqua - 3/4" G





Schuko plug
Spina schuko



Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	979 W
Air Volume	185 m ³ /h