



46 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

JS28 - JS28 + - JS38 - JS38L - JS46 - JS46L - JS54 - JS70 - JS70L - JS90 - JS90L



FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- Feet kit 100mm

RECOMMENDED DEPOSITS

15,0 kg
375 pcs

DIMENSIONS

	L x P x H (mm)
	500 x 540 x 704
	560 x 600 x 850

VOLTAGE

220-240/50/1
220/60/1

GAS

R290
GWP 3

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JS46L A AG 220-240/50/1N			1054	480	10	27.9	3.8	38	47
JS46L W AG 220-240/50/1N			1054	430	10	25.1	37.1	38	47

JS46L

JS46L ALL GAS

220-240/50/1

Spray Ice Makers

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Full Ice Cube 40 g -38/46 45 x 39 x 46 mm	20	40 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling







Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	46 101	45 99	41 90	34 75
21° 70°	39 86	38 84	34 75	28 62
32° 90°	37 82	36 79	32 71	26 57
38° 100°	35 77	34 75	30 66	22 48

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	41 90	40 88	36 79	32 71
21° 70°	41 90	40 88	36 79	30 66
32° 90°	40 88	39 86	35 77	29 64
38° 100°	37 82	36 79	32 71	24 53

DIMENSIONS

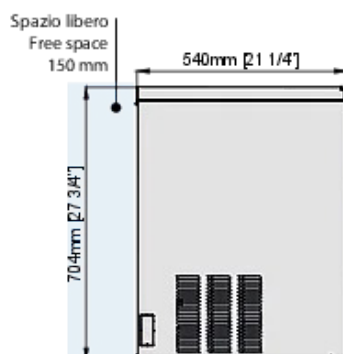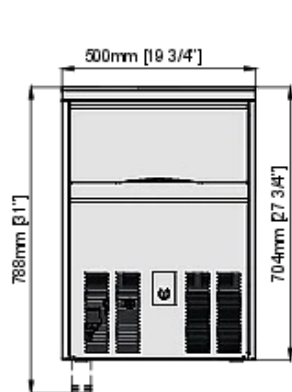

- (B) Electrical cable supply
Ingresso alimentazione elettrica
- (C) Water outlet connection
Attacco scarico acqua Ø 20 mm
- (D) Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm - 3/4" G
- (E) Water inlet connection / Attacco
entrata acqua - 3/4" G





Schuko plug
Spina schuko



Kit 4 Feet
Kit 4 piedini
Ø50mm H100-120 mm
(Opzionali-optional)

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1537 W
Air Volume	185 m ³ /h