



90 kg/ 24h

Spray Ice Makers / Spray Ice Makers:

JS28 - JS28 + - JS38 - JS38L - JS46 - JS46L - JS54 - JS70 - JS70L - JS90 - JS90L



JS90L

JS90L ALL GAS

220-240/50/1

Spray Ice Makers

FEATURES

- Steel shell
- Air or water condensation
- Sanitization cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- External cube weight adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow Technology



RECOMMENDED DEPOSITS

42,0 kg
1050 pcs

DIMENSIONS

	L x P x H (mm)
	700 x 580 x 1009
	760 x 640 x 1080

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA

		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	l / h	Kg	Kg
JS90L A AG 220-240/50/1N			1065	670	10	21.6	9.07	54	63
JS90L W AG 220-240/50/1N			1065	580	10	16.3	47.6	54	63

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
Full Ice Cube 40 g -70/90 45 x 39 x 46 mm	40	40 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling







Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	86 190	84 185	82 181	79 174
21° 70°	81 179	79 174	77 170	74 163
32° 90°	68 150	67 148	65 143	62 137
38° 100°	58 128	56 123	54 119	51 112

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	88 193	86 189	84 185	81 178
21° 70°	85 187	83 182	81 178	77 169
32° 90°	82 180	79 174	76 167	73 160
38° 100°	79 174	76 167	73 160	70 154

DIMENSIONS

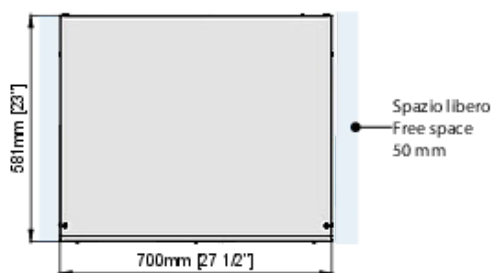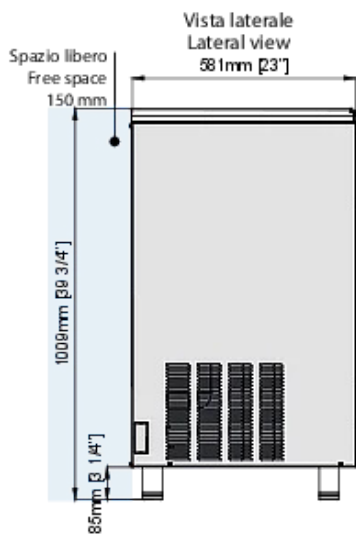
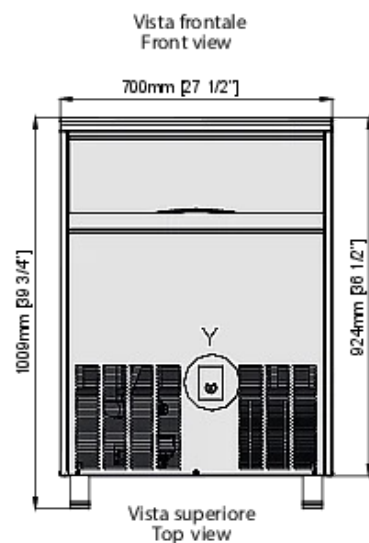


- B** Electrical cable supply
Ingresso alimentazione elettrica
- C** Water outlet connection
Attacco scarico acqua
Ø 20mm
- D** Water outlet connection
water condensation / Uscita
acqua condensatore ad
acqua Ø 20 mm - 3/4"G
- E** Water inlet connection / Attacco
entrata acqua - 3/4"G



ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	1770 W
Air Volume	310 m³/h