



 **400 kg/ 24h**

Nugget Ice Makers / Nugget Ice Makers:

JN95C - JN130C - JN160C - JN200C - JN125 - JN165 - JN205 - JN305S - JN405 - JN505

JN405

JN405 ALLGAS

220-240/50/1

Nugget Ice Makers



USB



PROGRAMMED
OZONE CYCLE



SCHEDULED
PRODUCTION



TOUCH
CONTROL



BLUETOOTH

FEATURES

- Steel shell
- Air and water condensation
- Sanitization cycle
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Programmable ice production
- Predictive failure analysis
- Equipment performance report
- Removable and washable air filter
- Frontal air intake and exhaust



ICE TYPE

	WEIGHT ICE PESO GHIACCIO	RESIDUAL WATER CONTENUTO ACQUA
 Nugget Ice M 15.8 x 7.7 x 15 mm	1.1 g	8%

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	400 881	395 870	386 850	349 769
21° 70°	385 848	367 808	352 775	323 711
32° 90°	338 744	324 714	310 683	279 614
38° 100°	249 548	240 528	229 504	207 456

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	410 903	401 883	387 852	349 769
21° 70°	412 908	391 861	378 833	341 751
32° 90°	391 861	377 830	356 784	328 722
38° 100°	359 791	346 762	326 718	297 654

OPTIONAL

- Programmable sanitizing cycle with ozone

RECOMMENDED DEPOSITS

MG405(KBM405)
MG505(KBM505)

DIMENSIONS

L x P x H (mm)



665 x 668 x 709



750 x 727 x 855

VOLTAGE



220-240/50/1
220/60/1

GAS



R290
GWP 3

TECHNICAL DATA



cond



comp. W



ABS. W



Fuse



Kwh/100Kg



I/ h




Kg



Kg

JN405	A AG	220-240V/50/1		2446	1400	16	10.7	13.1	103	112
JN405	W AG	220-240V/50/1		2446	1300	10	8.3	65.6	103	112

DIMENSIONS

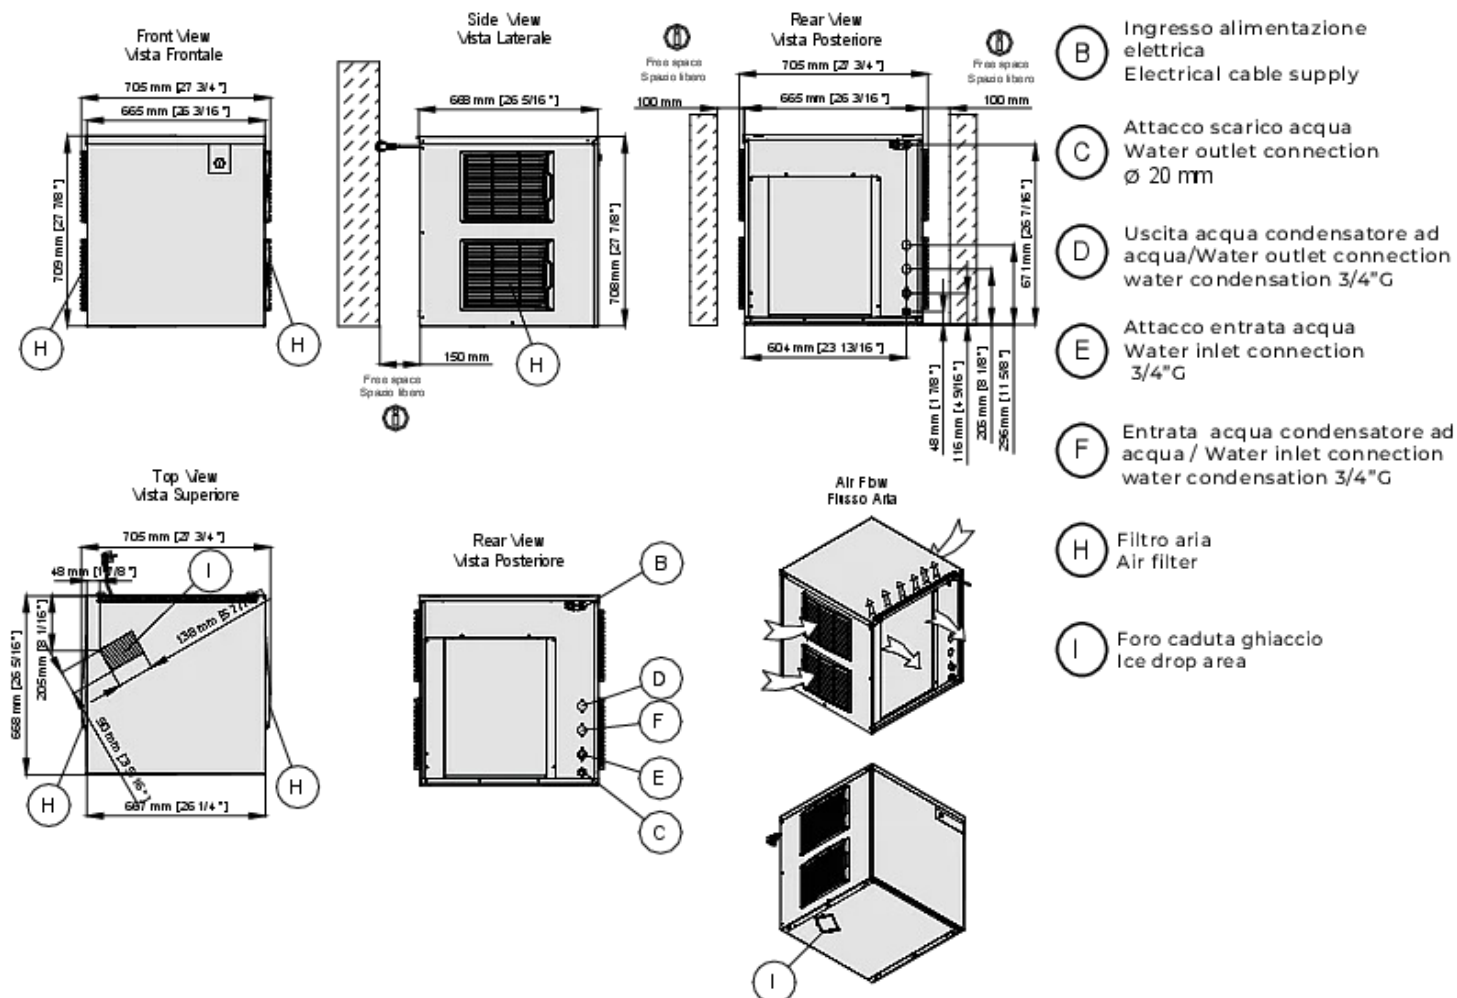

ICEWORLD

Allows control and monitoring of ice makers directly from smartphones / Allows control and monitoring of ice makers directly from smartphones



Available on the
Google Play



Download on the
App Store

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
 (LED continuously changing colors from white to red)

Heat expelled	2594 W
Air Volume	300 m³/h