



98 kg/ 24h

Palette Ice Makers / Palette Ice Makers:

JP 23 - JP23n - JP25 - JP30 - JP36 - JP45 - JP50 - JP62 - JP80 - JP95 - JP150



FEATURES

- Steel shell
- Air or water condensation
- Washing cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP Alarm Report
- Storage ice level adjustment
- USB connection for sw update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

OPTIONAL

- Programmable sanitizing cycle with ozone
- Nanotechnological evaporator treatment with Rainbow technology
- Feet kit 100mm

TECHNICAL DATA

									
		cond	comp. W	ABS. W	Fuse	Kwh/100Kg	I / h	Kg	Kg
JP95 A AG 220-240V/1N/50Hz			1589	600	10	16.8	8.56	66	76
JP95 W AG 220-240V/1N/50Hz			1589	580	10	10.3	67.9	66	76



RECOMMENDED DEPOSITS

40 kg
1904 pcs

DIMENSIONS

	L x P x H (mm)
	800 x 585 x 956
	860 x 640 x 1050

VOLTAGE

 220-240/50/1
220/60/1

GAS

 R290
GWP 3

JP95

JP95 ALLGAS

220-240/50/1

Palette Ice Makers

ICE TYPE

	PCS / CYCLE PZ / CICLO	WEIGHT ICE PESO GHIACCIO
	Hollow Cube 80-95 29 x 32.5 x 41 mm	60 21 g

ICE PRODUCTION

kg/24h
lbs/24h

Air cooling




Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	96 212	94 207	89 196	80 176
21° 70°	88 194	86 190	82 181	75 165
32° 90°	77 170	75 165	72 159	66 145
38° 100°	62 137	60 132	58 128	53 117

Water cooling



Temp. Aria Air Temp.	Temp. Acqua /Water Temp.			
°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10° 50°	105 231	100 220	95 209	88 194
21° 70°	103 227	98 216	93 205	86 190
32° 90°	100 220	96 212	91 201	84 185
38° 100°	92 203	90 198	85 187	78 172

DIMENSIONS

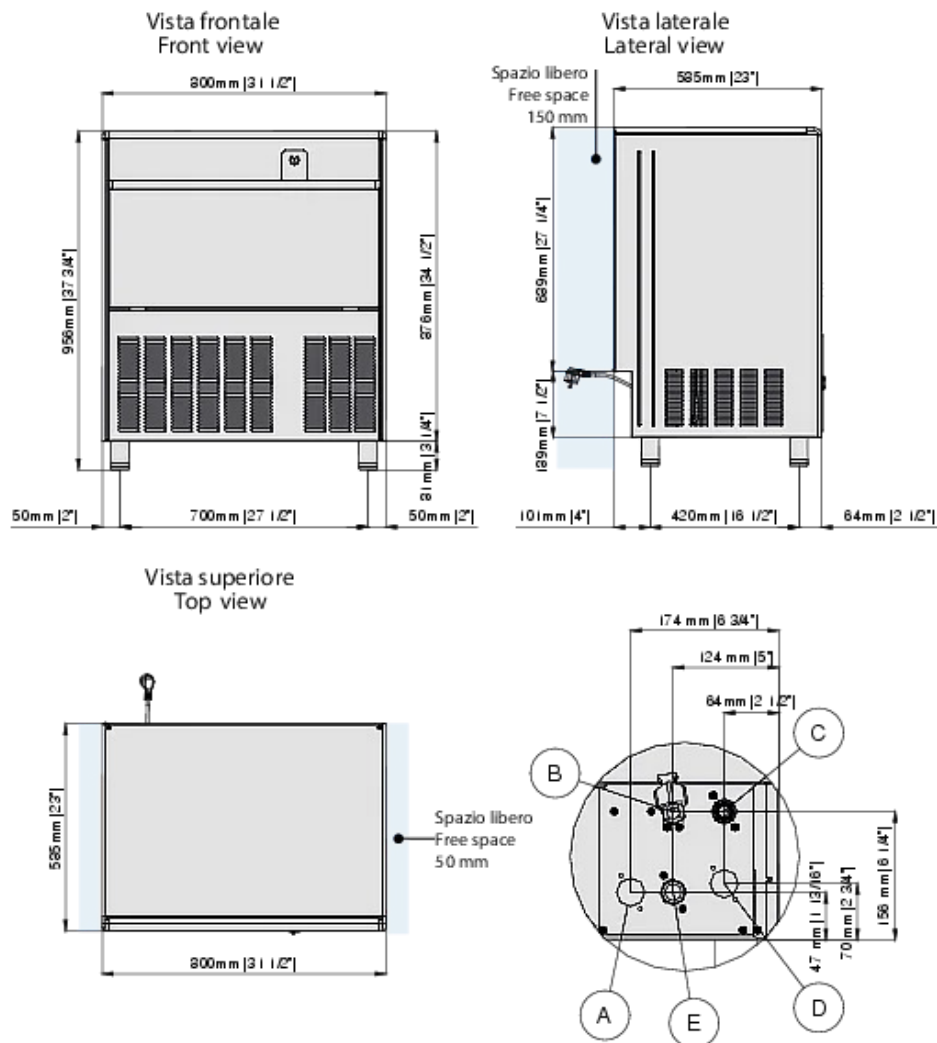

- A** Entrata acqua condensatore ad acqua / Water inlet connection water condensation OPTIONAL 3/4"G
- B** Ingresso alimentazione elettrica / Electrical cable supply
- C** Attacco scarico acqua / Water outlet connection Ø 20 mm
- D** Uscita acqua condensatore ad acqua / Water outlet connection water condensation 3/4"G
- E** Attacco entrata acqua / Water inlet connection 3/4"G




Schuko plug
Spina schuko

ICEWORLD



Available on the
Google Play



Download on the
App Store

Operating conditions

	Min	Max
Temp. Ambient	10°C	40°C
Temp. Water Ice	5°	35°
Water Pressure	1 Bar (14psi)	10 Bar (140psi)
Conductivity water	20 microS	500 microS
Power Supply	-10%	+10%

TOUCH CONTROL



Capacitive Stand-by / Start button
(LED continuously changing colors from white to red)

Heat expelled	2218 W
Air Volume	500 m³/h